




Continental Remediation LLC

Move the Solution, Not the Problem

Completed Project-Home Heating Oil Remediation - Gibbstown, N J

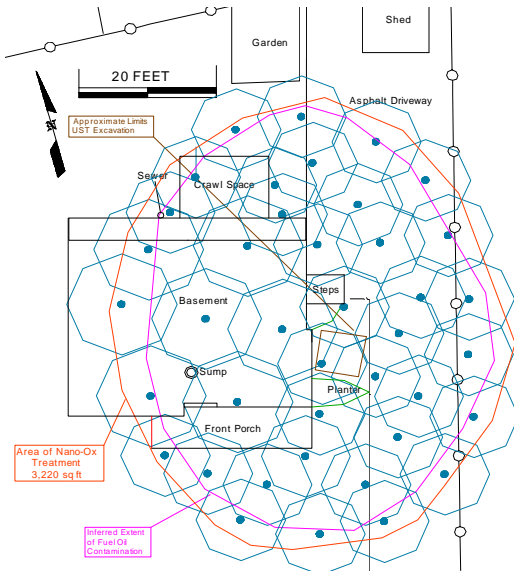

Contamination extended beneath the residence, into the yard and slightly into the neighbor's yard. Remediation injection was completed in three days including seven points through the cellar floor.

Groundwater Samples						
Date	MW-1	MW-2	MW-3	MW-4	MW-5	MW-6
5/3/2006	Above GQC	Below GQC	Below GQC	Below GQC	Below GQC	Below GQC
9/7/2006	Above GQC	Below GQC	NT	NT	NT	NT
1/22/2007	Below GQC	Below GQC	Below GQC	Below GQC	Below GQC	Below GQC
1/23-25/07	Nano-Ox Injections					
2/26/2007	Above GQC	Below GQC	Below GQC	Below GQC	Below GQC	Above GQC
5/3/2007	Above GQC	Below GQC	Below GQC	Above GQC	Below GQC	Below GQC
6/18/2007	Below GQC	Below GQC	Below GQC	Below GQC	Below GQC	Below GQC
7/26/2007	Below GQC	NT	NT	Below GQC	NT	NT

Soil Samples										
	HA-5, HA-8, HA-13	HA-13	HA-9, HA-12	HA-6, HA-9, HA-9	HA-6, HA-9, HA-12	HA-6, HA-9, HA-9	HA-6, HA-9, HA-9	HA-10, HA-11	HA-7, HA-10, HA-11	HA-7, HA-10, HA-10
Depth	7-7.5' bg	8-8.5' bg	5-5.5' bg	7-7.5' bg	8-8.5' bg	8.5-9	9.5-10' bg	7-7.5' bg	7.5-8' bg	8-8.5' bg
1/22/2007	ND	NT	NT	1,900	11,000	4,300	3,100	NT	6,800	8,600
1/23-25/07	Nano-Ox Injections									
2/26/2007	32,000	NT	13,000	ND	5,800	850	1,300	ND	ND	39,000
5/3/2007	ND	2,700	ND	ND	4,000	ND	ND	5,300	ND	ND
7/24/2007	NT	NT	NT	NT	NT	NT	NT	3800	NT	NT

All soil sample results were below NJDEP standards on the first round of soil samples @ 13 weeks. Groundwater was below standards @ 20 weeks. **NFA @ 22 Months**

184 Riverview Avenue 2nd FL
Waltham, MA 02453-3843
800-425-7900 Fax 866-461-8183
800-425-7900 Fax 866-461-8183



CONTINENTAL
REMEDICATION LLC